


325-340_w

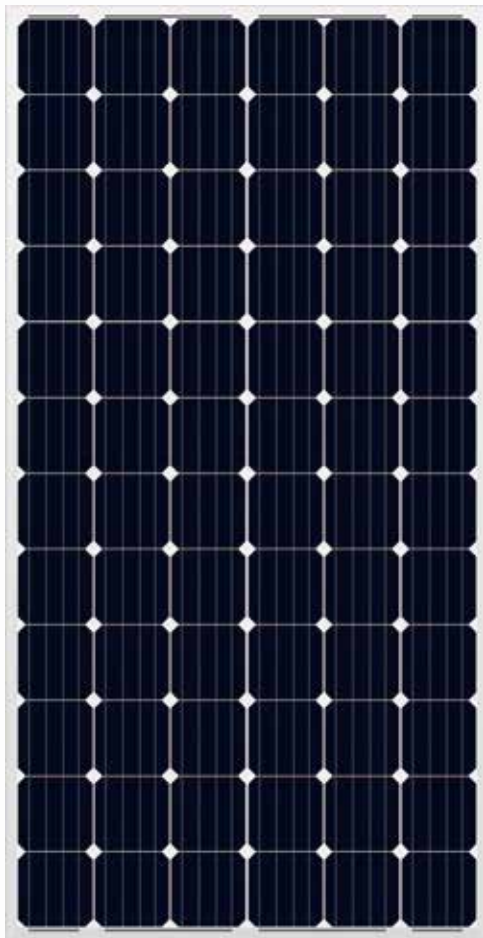

MANAGEMENT SYSTEM

- ISO 9001: Quality management system
- ISO 14001: Standard for environmental management system
- OHSAS 18001: International standard for occupational health and safety assessment system


PRODUCT CERTIFICATES



INSURANCE



WARRANTY

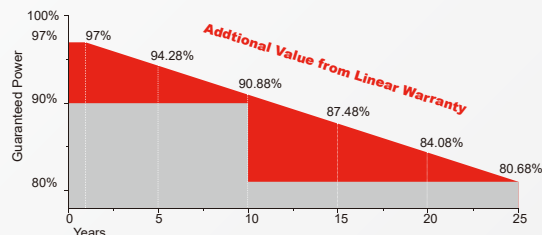

10 YEARS Guarantee on product material and workmanship **25 YEARS** linear power output warranty

Safety

- Safety for salt mist corrosion (IEC61701, tested in TÜV SÜD)
- Safety for ammonia corrosion (IEC62716, tested in TÜV SÜD)
- Safety for fire risk (Class C, tested in TÜV SÜD and Rheinland)

Reliability

- PID free products, passing TÜV SÜD system voltage durability test
- World 1st company to pass "Thresher Test" and "On-site Power Measurement Validation" certificate
- Bankable products

Performance

- Outstanding power output capability at low irradiance
- Triple 100% Electroluminescence (EL) tests minimize breakage rate
- Top rank in Photon yield measurement

SRP-6MA SERIES 6 INCH 72 CELLS



*BLACK FRAME / BLACK BACK-SHEET PRODUCTS ARE AVAILABLE UPON REQUEST.

Electrical Characteristics(STC)

Module Type	SRP-325-6MA	SRP-330-6MA	SRP-335-6MA	SRP-340-6MA
Maximum Power at STC - P_{mp} (W)	325	330	335	340
Open Circuit Voltage - V_{oc} (V)	45.9	46.1	46.4	46.6
Short Circuit Current - I_{sc} (A)	9.04	9.14	9.23	9.32
Maximum Power Voltage - V_{mp} (V)	37.1	37.3	37.5	37.7
Maximum Power Current - I_{mp} (A)	8.77	8.85	8.94	9.02
Module Efficiency STC- η_m (%)	16.75	17.01	17.26	17.52

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

Power measurement tolerance: +/-3%

Electrical Characteristics(NOCT)

Module Type	SRP-325-6MA	SRP-330-6MA	SRP-335-6MA	SRP-340-6MA
Maximum Power at NOCT - P_{mp} (W)	241	245	249	252
Open Circuit Voltage - V_{oc} (V)	42.4	42.6	42.8	43
Short Circuit Current - I_{sc} (A)	7.36	7.45	7.53	7.59
Maximum Power Voltage - V_{mp} (V)	35	35.2	35.3	35.5
Maximum Power Current - I_{mp} (A)	6.89	6.96	7.05	7.1

NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed : 1m/s

Power measurement tolerance: +/-3%

Power Tolerance (W)	(0,+4.99)
Maximum System Voltage (V)	1000 (TÜV),1000 (UL)
Maximum Series Fuse Rating (A)	15

Temperature Characteristics


Pmax Temperature Coefficient	-0.40 %/°C
Voc Temperature Coefficient	-0.32 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

	1956 x 992 x 50mm		1956 x 992 x 40mm	
	20'GP	40'GP	20'GP	40'GP
Container				
Pieces per Pallet	21	21	26	26
Pallets per Container	10	22	10	22
Pieces per Container	210	462	260	572

Mechanical Specifications



External Dimensions	1956 x 992 x 50 mm	1956 x 992 x 40 mm
Weight	24 kg	23 kg
Solar Cells	Mono crystalline 156 x 156 mm (72pcs)	Mono crystalline 156 x 156 mm (72pcs)
Front Glass	3.2 mm tempered glass, low iron	3.2 mm tempered glass, low iron
Frame	Anodized aluminium alloy	Anodized aluminium alloy
Junction Box	IP67	IP67
Output Cables	4.0 mm ² ,cable length:900 mm	4.0 mm ² ,cable length:900 mm
Connector	MC4 Compatible	MC4 Compatible
Mechanical Load	5400 Pa	5400 Pa

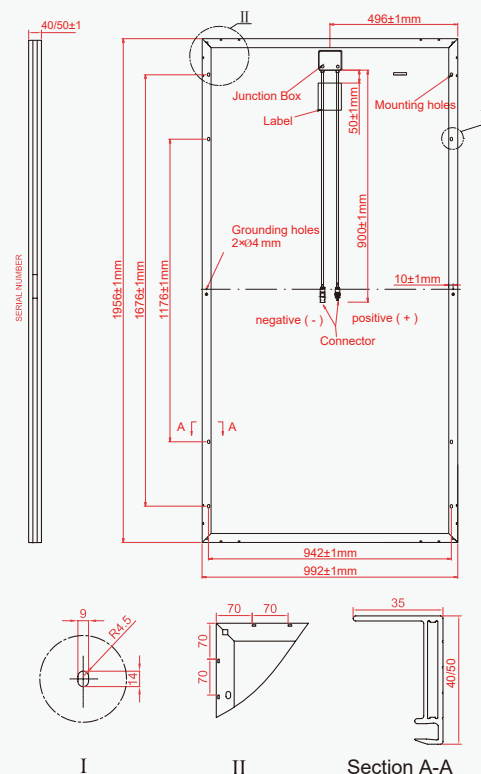

* All Dimensions in mm

* The above drawing is a graphical representation of the product. For engineering quality drawings please contact SERAPHIM.

I-V&P-V Curve(SRP-320-6MA)

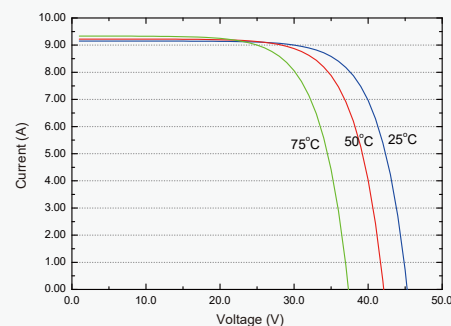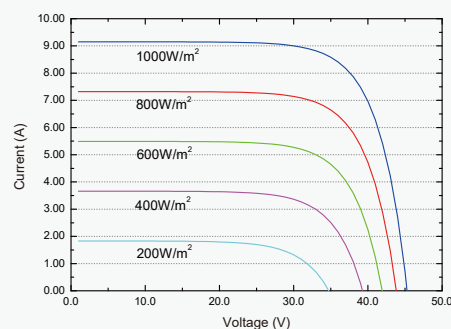

Specifications are subject to change without further notification SRP-DS-EN-2016V3.0 © Copyright 2016 Seraphim